



AIR CONDITIONING



REFRIGERATION



HEATING



maxi orange

CONDENSATE REMOVAL PUMP

Need more performance? Designed for larger units, the Maxi Orange pump gives you the extra power when you need it.



35L/h max. flow

15m max. rec. head
(flow rate 10L/h)

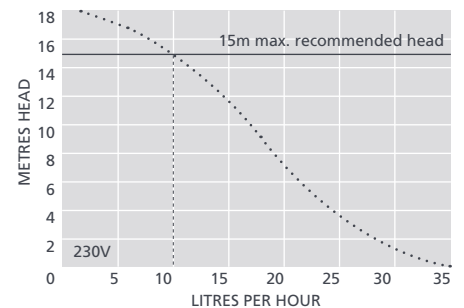


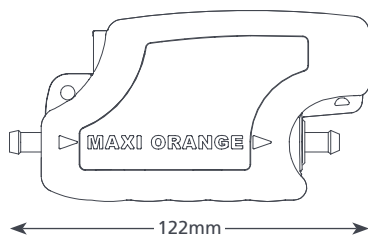
35dB(A)

KEY FEATURES

- High power motor
- Superior performance
- Submersible secondary reservoir included

SUITABILITY

- Up to 46kW / 157,000Btu/h
- High wall split systems; Ducted units; Floor standing & Chassis units
- ✓ **Perfect for...** Large commercial units

0.45[†]
kg

MAXI ORANGE SPECIFICATIONS

Max. flow	35L/h @ 0 head
Max. rec. head	15m
Max. suction lift	2m
Sound level@1m	35dB(A)
Power supply	230V AC 50-60Hz 0.1A*
Rated	Non continuous
Class	II appliance <input type="checkbox"/>
Max. unit output	46kW / 157,000Btu/h
Max. water temp	40°C / 104°F
Discharge tube	6mm ID
IP Protection	IPX1
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	✓
Self priming	✓

MAXI ORANGE OPTIONS

Maxi Orange	FP2210
-------------	--------

* Other voltages available
† Pump only

SUGGESTED XTRA ACCESSORIES

Description	Part No.
1 Amp Fuse	FP2620
Tube To Soil Stack Adaptor	FP2038
Vinyl Tube Braided 1/4" (6mm)	AX5100
Inline Filter 16mm	FP2640

Xtra For more installation accessories take a look at our Aspen Xtra range

IN THE BOX

Maxi Orange pump • 1.5m Plug & play power cable • Reservoir • Reservoir lid with 1.5m sensor cable • Submersible reservoir • Anti siphon device • Float & filter • 1.5m Suction tube 6mm ID • 220mm Orange inlet hose 14mm ID • 150mm Vinyl breather tube 6mm ID • Drain connector kit • Fixing kit • Install manual

Download manual at aspenpumps.com
View install video at aspenpumps.com

TEL : 0212 251 42 22 www.gizteknik.com.traspenpumps.com

+44 (0)1323 848842

sales@aspenpumps.com

Making life easier for the installer